



| Kit Contents | | |
|--------------------------------|---------|-----|
| Description | Part No | Pcs |
| Cable ties 4,8x290 | | 8 |
| Holder plate | | 4 |
| Connector | | 4 |
| Pin contact | | 8 |
| Screw M4x8 | | 8 |
| Screw M4x5 | | 8 |
| Cancellation kit front (35 cm) | | 2 |
| Cancellation kit rear (100 cm) | | 2 |

👁 Note!

Please note that this image is a general representation of the product and may differ slightly from your product.

Cancellation kit, Nissan GT-R, type R35

35020-06

Mounting Instructions

MOUNTING INSTRUCTIONS

⚠ Warning!

It is advisable to have an Öhlins dealer install the cancellation kit.

⚠ Warning!

If working on a raised vehicle, ensure it is securely supported.



Preparation:

1

Cut off 150 mm / 5,9 inch of the standard damper control cable.




2

Remove 15 mm / 0,6 inch of the cable insulation and 4-5 mm / 0,16 - 0,2 inch of the wire insulation. Attach the heat shrink tube.



3

Install the supplied pin contact with a correct tool.

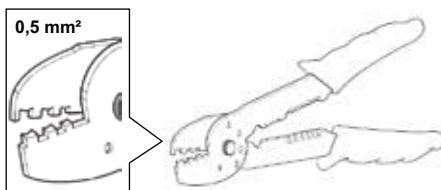

4

Insert the completed wire into the connector until to the lock. The pin position / cable colour is not relevant.



MOUNTING INSTRUCTIONS

Front axle:

5

Install the cancellation kits with the supplied M4 screws on the holder plate.



6

Dismantle the marked covers.



MOUNTING INSTRUCTIONS

7

Install the cancellation kit and the holder with the supplied tapping screw thread.

⚠ Caution!

The cancellation kit gets very hot! All attached lines within a distance of 2 cm / 0,8 inch have to be removed further away from the kit.



8

Run the standard damper control wire with adapter to the cancellation kit connector. Insert the standard connector into the cancellation kit connector until it locks. Fix the wire on the cable wire harness with cable ties.





MOUNTING INSTRUCTIONS

Rear axle:

9

Install the cancellation kits with the supplied M4 screws on the holder plate.

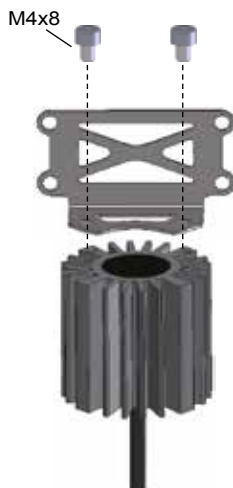

10

Dismantle the side covers.



11

Run the standard damper control wire with adapter to the cancellation kit connector. Insert the standard connector into the cancellation kit connector until it locks. Fix the wire on the cable wire harness with cable ties.



12

Install the cancellation kit and the holder with the supplied tapping screw thread.

⚠ Caution!

The cancellation kit gets very hot! All attached lines within a distance of 2 cm / 0,8 inch have to be removed further away from the kit.



👁 Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Part no. MI_35020-06_0
Issued 2016-05-17

© Öhlins Racing AB. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

Öhlins Racing AB
Box 722
S-194 27 Upplands Väsby, Sweden
Phone +46 8 590 025 00
fax +46 8 590 025 80



www.ohlins.com