

INSTALLATION INSTRUCTIONS

FUEL PUMP ACCESS COVER

08-14 SUBARU (Steps 1-10)
15-21 SUBARU (Steps 9-16)

Document: 19-0269
Support: info@radiumauto.com

CAUTION

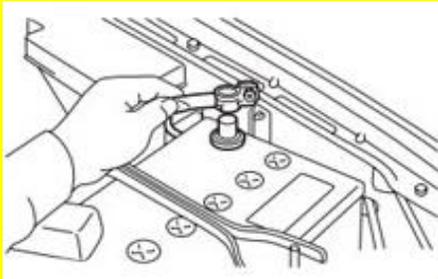
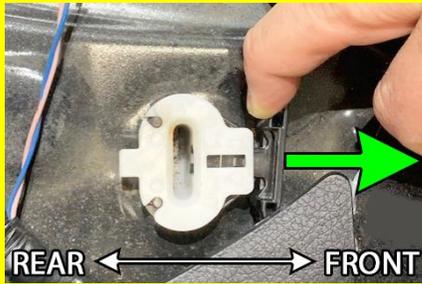
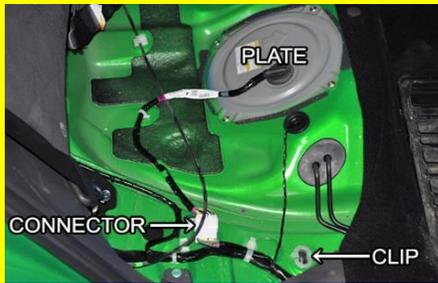
Only a qualified technician following applicable safety procedures should perform the installation of this product. One must have knowledge in repair and modification of fuel systems and general vehicle modifications to install this product.

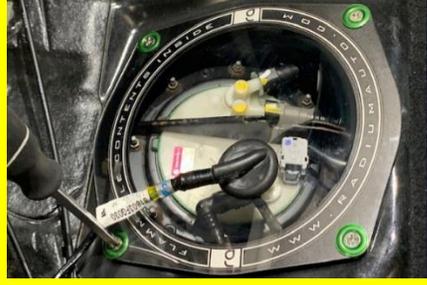
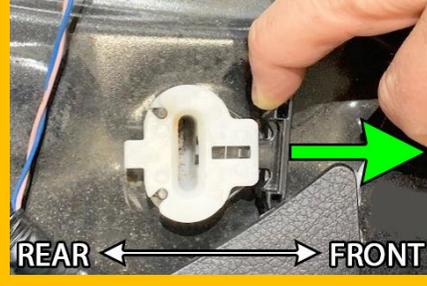
Gasoline and other fuels are flammable and can be explosive.

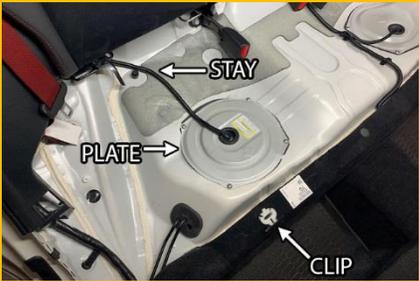
Only install in a well-ventilated location to minimize buildup of fuel vapors. No sparks, open flames, smoking or other ignition sources are to be present. Draining and removal of all fuel from the fuel system is recommended. Proper eye and personal protection is required at all times during installation.

WARNING

The fuel system is under pressure! Do not loosen any connections until relieving the fuel system pressure. Consult a service manual for instructions on relieving fuel pressure safely. This product is designed for off-highway and racing use only. Fuel system components may not be legal for sale or use on emissions controlled motor vehicles. Consult local, state, and federal laws.

STEP	TOOLS NEEDED	INSTRUCTIONS	PHOTO
1	10mm Socket Wrench	2008-2014 SUBARU ONLY Open the hood and disconnect the battery's negative terminal. CAUTION: Disconnecting the battery may cancel fault memories of some control units. Consequently, before disconnecting the battery, always cross examine any fault memories.	
2		2008-2014 SUBARU ONLY The rear bench is held in by 3 clips. The RH side receiver clip is shown. To unlock, pull the LH and RH clip levers forward one by one (as shown). Next, find the center point of the seat, reach underneath and pull straight up.	
3		2008-2014 SUBARU ONLY After removing the seat from the vehicle, note the 3 areas depicted.	
4	Flathead Screwdriver	2008-2014 SUBARU ONLY Disconnect the white 12-pin wiring harness connector. There is a white electrical stay located between the white 12-pin connector and the access plate (shown). Carefully pry up to release.	

5	Phillips Screwdriver	2008-2014 SUBARU ONLY	
		Unscrew the 4 fuel pump access plate screws.	
		Push the rubber grommet through the OEM fuel tank access cover.	
		Unplug the electrical connector from the fuel hat.	
		The OEM access cover, foam, and 4 screws will not be reused.	
6	Scissors	2008-2014 SUBARU ONLY	
		Install the provided adhesive foam around the perimeter of the hole. As shown, cut to length. For best results, lineup the start and end pieces of the foam to form a perfect seal.	
7		2008-2014 SUBARU ONLY	
		There are 2 ways the wires can be fed to the fuel pump.	
		Option 1 - Reusing the OEM rubber grommet in the circular cutout like factory. <i>Install Time: 1 min.</i>	
		Option 2 - Passing wires through the trunk floor sheet metal grommet (shown). Apply the included clear stickers to each side of the access cover cutout hole. <i>Install Time: 20 min.</i>	
8	Phillips Screwdriver	2008-2014 SUBARU ONLY	
		Using the provided countersink screws, secure the access panel. Reconnect the battery.	
		INSTALLATION COMPLETE	
		<i>NOTE: The included clear stickers will not be used if the OEM rubber grommet is reused as shown.</i>	
9	10mm Socket Wrench	2015-2021 SUBARU ONLY	
		Open the hood and disconnect the battery's negative terminal.	
		CAUTION: Disconnecting the battery may cancel fault memories of some control units. Consequently, before disconnecting the battery, always cross examine any fault memories.	
10		2015-2021 SUBARU ONLY	
		The rear bench is held in by 3 clips. The RH side receiver clip is shown. To unlock, pull the LH and RH clip levers forward one by one (as shown).	
		Next, find the center point of the seat, reach underneath and pull straight up.	

11		2015-2021 SUBARU ONLY	
		After removing the seat from the vehicle, note the 3 areas depicted.	
12	10mm Socket Wrench	2015-2021 SUBARU ONLY	
		Disconnect the wire loom stay.	
13	Phillips Screwdriver	2015-2021 SUBARU ONLY	
		Unscrew the 4 fuel pump access plate screws.	
		Push the rubber grommet through the OEM fuel tank access cover.	
		Unplug the electrical connector from the fuel hat.	
		The OEM access cover, foam, and 4 screws will not be reused.	
14	Scissors	2015-2021 SUBARU ONLY	
		Install the provided adhesive foam around the perimeter of the hole. As shown, cut to length. For best results, lineup the start and end pieces of the foam to form a perfect seal.	
15		2015-2021 SUBARU ONLY	
		There are 2 ways the wires can be fed to the fuel pump.	
		Option 1 - Reusing the OEM rubber grommet in the circular cutout like factory. <i>Install Time: 1 min.</i>	
		Option 2 - Passing wires through the trunk floor sheet metal grommet (shown). Apply the included clear stickers to each side of the access cover cutout hole. <i>Install Time: 20 min.</i>	
16	Phillips Screwdriver	2015-2021 SUBARU ONLY	
		Using the provided countersink screws, secure the access panel. Reconnect the battery.	
		INSTALLATION COMPLETE	
		<i>NOTE: The included clear stickers will not be used if the OEM rubber grommet is reused as shown.</i>	